

MIDWEST Fasteners, Inc. 450 Richard St. • Miamisburg, OH 45342 www.midwestfasteners.com • email: sales@midwestfasteners.com Toll Free: 800/852-8352 • Fax: 937/866-4174



The **CD700** from Midwest Fasteners is designed specifically for the insulation contractor. In fact, it is one of the most powerful capacitor discharge units available today. The CD700 features a separate cup head weld pin contact mode that welds to materials as thin as 20 gauge – without fear of burn through. A unique feature is the 84,000 to 168,000 MFD variable capacitance high/low power range switch which handles the toughest applications. The high power range helps eliminate surface preparation when welding "Power Tip" pins from Midwest Fasteners.


The unit's solid state circuitry lowers maintenance costs, since moving parts are eliminated. And the rugged steel chassis makes the CD700 able to withstand the rigors of construction jobsites. Gauges and control knobs are protected by a recessed control panel. Circuit breaker protection prevents expensive repair to component


parts, such as printed circuit board. The auto fault shut off adds to operator safety, and the panel meter displays capacitor discharge voltage at a glance.

An ultra-light 24 ounce Precision Contact Gun is included with the CD700 system. With this gun, operator fatigue is reduced – thereby increasing production. The weld gun also features interchangeable main spring pressure that is necessary for many special welding applications, and critical in welding aluminum fasteners and dissimilar materials. The unique drilled through gun shaft enables precise gun set up for welding aluminum pins and extra long CD weld pins.

The CD700. Available only from Midwest Fasteners your complete source for insulation fastening.

CD700 CAPACITOR DISCHARGE WELDING SYSTEM

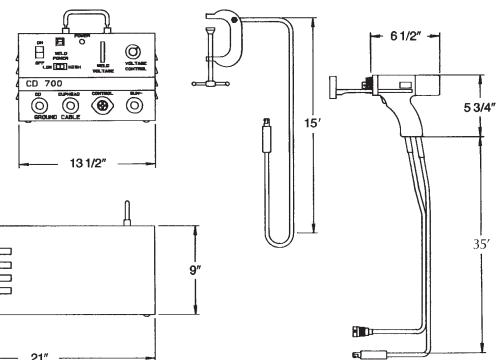

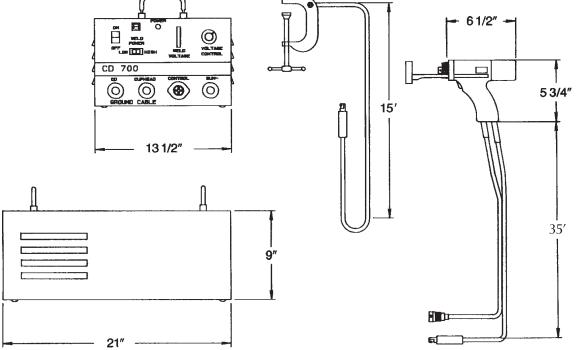

SPECIFICATIONS: POWER SUPPLY/CONTROLLER

Height	9″
Width	13-1/2″
Depth	21″
Weight	66 Pounds
Capacitance	Low - 84,000 mfd
	High - 168,000 mfd
Weld Rate	up to 14/Min.
Weldable Materials	Mild Steel, Stainless Steel,
	Aluminium
Pin/Stud Range	14 Ga, thru 3/8" Dia. weld ba
Weld Voltage	34-175 VDC
Weld Mode	Contact, Cuphead
Power Requirement	115VAC, 60 Hz, 30 Amp



MIDWEST Fasteners, Inc. 450 Richard St. • Miamisburg, OH 45342 www.midwestfasteners.com • email: sales@midwestfasteners.com Toll Free: 800/852-8352 • Fax: 937/866-4174

WELD GUN (CD-2P PRECISION)

Weight

Size (LWH) Weldable Dia. Material

CABLES

ase

Ground Cable Gun Extension Set

1-1/2 Lbs. (Not including cable) 6-1/2" x 2" x 5-3/4" 14 Gauge through 3/8" Dia. High strength, impact resistance, polycarbonate

#1 x 15 Ft. (one each) #1 x 18/2 x 35 Ft. (direct to gun)